

The motor is available either with plain copper connecting tabs (two tabs on the rear of the motor which can be soldered or crimped onto), or it can come supplied with 500mm long silicone-insulated leads, red and black. Allow for one extra working day to process your order if a lead option is added, since these are soldered and insulated to-order.

See the technical details tab for more information.

Motor dimensions:

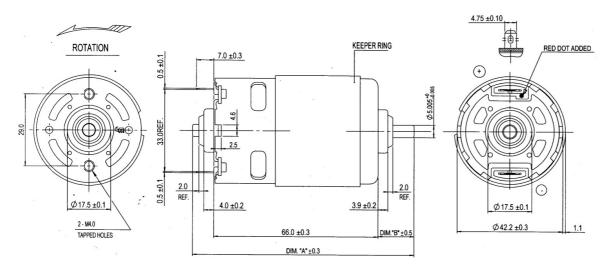

Performance characteristics:

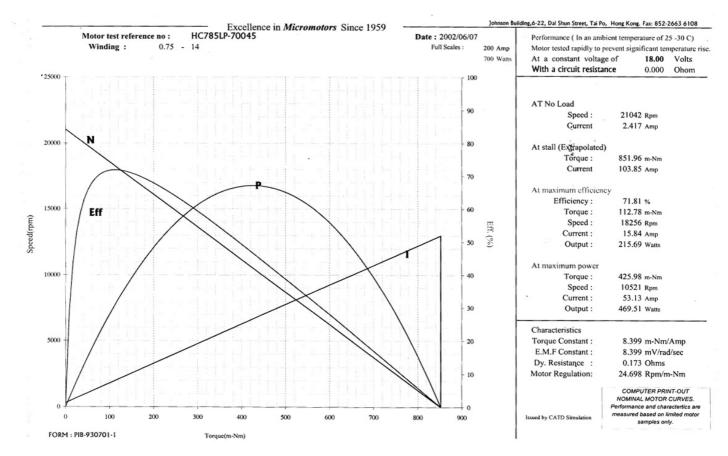

Related Products